


Disconnect Terminals



ASK 2 B

Width: 8 mm





ASK 3 A

Width: 6,2 mm





AVK 2,5 EA

Width: 6 mm



AVK 2,5 CCA

Width: 6 mm



Cat No:

- 360 119
- 360 110

Cat No:

- 353 109
- 353 100

Cat No:

- 324 949
- 324 940

Cat No:

- 324 939
- 324 930



Electrical Ratings
CE (EN 60947-7-1)
UL
VDE (IEC 60947-7-1)
CSA
ATEX

Voltage, V ~	Current, A	Cross-Section
500	6,3	6 mm ²
300	6,3	AWG 26-8

Voltage, V ~	Current, A	Cross-Section
500	16	4 mm ²
600	16	AWG 26-10

Voltage, V ~	Current, A	Cross-Section
400	16	2,5 mm ²

Voltage, V ~	Current, A	Cross-Section
400	16	2,5 mm ²

Voltage, V ~	Current, A	Cross-Section
400	16	2,5 mm ²

Connection Data
Conductor cross section solid (min.-max.)
Conductor cross section stranded (min.-max.)
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, (min.-max.)
AWG Conductor
Insulation Stripping Length (min.-max.)
Torque (min.-max.)
Screwdriver


0,2-10 mm ²
0,2-10 mm ²
0,5-4 mm ²
AWG 24-8
10-12 mm
0,8-1,2 Nm
IKT 3 (0,6x3,5)

0,2-6 mm ²
0,2-6 mm ²
0,5-2,5 mm ²
AWG 24-10
9-10 mm
0,5-0,8 Nm
IKT 3 (0,6x3,5)

0,2-4 mm ²
0,2-4 mm ²
0,5-1,5 mm ²
AWG 24-12
9-10 mm
0,4-0,6 Nm
IKT 3 (0,6x3,5)

0,2-4 mm ²
0,2-4 mm ²
0,5-1,5 mm ²
AWG 24-12
9-10 mm
0,4-0,6 Nm
IKT 3 (0,6x3,5)

0,2-4 mm ²
0,2-4 mm ²
0,5-1,5 mm ²
AWG 24-12
9-10 mm
0,4-0,6 Nm
IKT 3 (0,6x3,5)

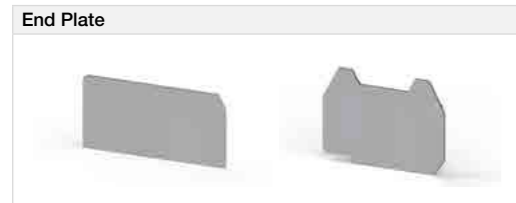

Type	Cat.No.	Qty.
NPP/ASK 2	450 049	25

Type	Cat.No.	Qty.
NPP/ASK 3	450 059	10

Type	Cat.No.	Qty.
NPP/AVK 2,5 CC	444 139	25

Type	Cat.No.	Qty.
NPP/AVK 2,5 CC	444 139	25

Type	Cat.No.	Qty.
NPP/AVK 2,5 CC	444 139	25



Type	Cat.No.	Qty.
UK 4/2	476 232	25
UK 4/3	476 233	20
UK 4/4	476 234	15

Type	Cat.No.	Qty.
UK 4/2	476 232	25
UK 4/3	476 233	20
UK 4/4	476 234	15

Type	Cat.No.	Qty.
UK 4/2	476 232	25
UK 4/3	476 233	20
UK 4/4	476 234	15

Type	Cat.No.	Qty.
UK 4/2	476 232	25
UK 4/3	476 233	20
UK 4/4	476 234	15

Type	Cat.No.	Qty.
UK 4/2	476 232	25
UK 4/3	476 233	20
UK 4/4	476 234	15

Technical Data
Rated Impulse Voltage / Pollution severity
Insulation material group / Gauge pin code according to IEC 60947-1
Protection class / Protection conductor type
Marking Tags (Dekafix)

6/3
1/B5
IP 20 / -
See pages 194-207 for usage of Dekafix

6/3
1/A4
IP 20 / -
See pages 194-207 for usage of Dekafix

6/3
1/A3
IP 20 / -
See pages 194-207 for usage of Dekafix

6/3
1/A3
IP 20 / -
See pages 194-207 for usage of Dekafix

6/3
1/A3
IP 20 / -
See pages 194-207 for usage of Dekafix

Package Quantity
25 pcs.

25 pcs.

50 pcs.

50 pcs.

80 pcs.

80 pcs.
